


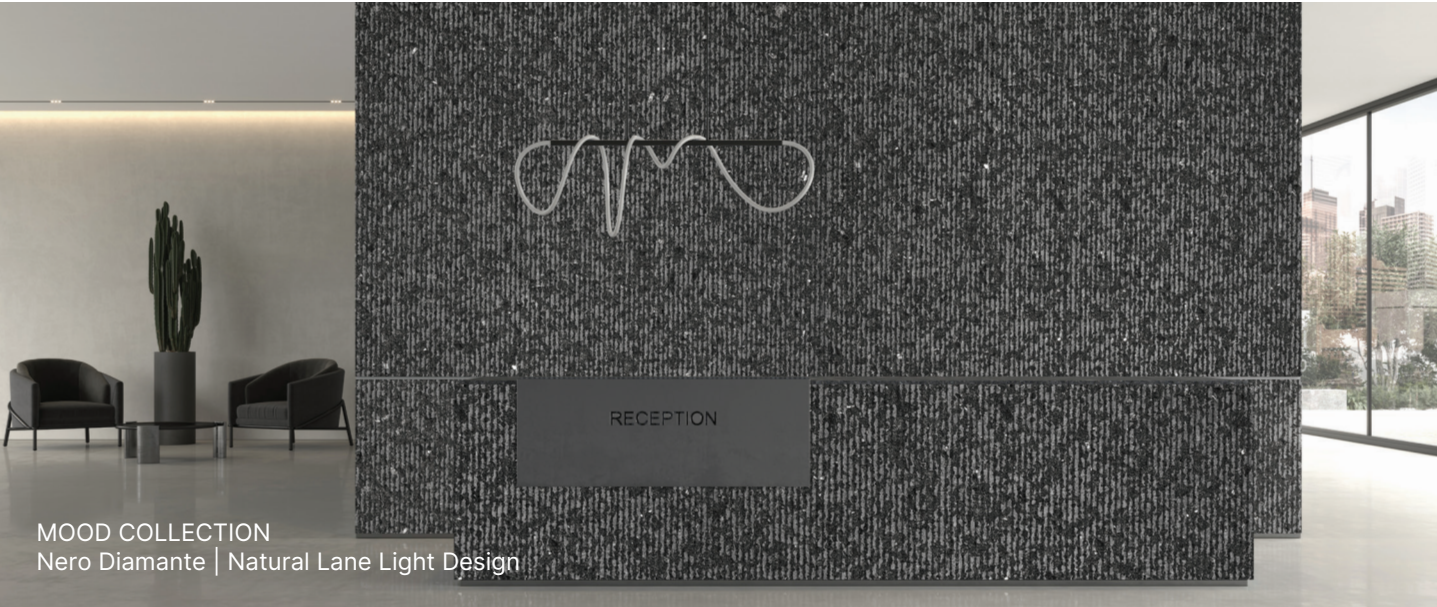


Nero Diamante | Granite

Test	Std.	Unit	Ave. Value	Condition
Dry Density	EN 1936	(gr/cm3)	2.77	-
Saturated Density	EN 1936	(gr/cm3)	2.77	-
Porosity	EN 1936	(%)	0.25	-
Specific Gravity	EN 1936	(Kg/m3)	2.78	-
Water Absorption Under Atmosphere Pressure	EN 13755	(%)	0.08	-
Thermal Expansion Coefficient	EN 14581	10 ⁻⁶ C ⁻¹	3.01	-
Capillary Water Absorption	EN 1925	(Kg/m2)	0.19	-
Compressive Strength	EN 1926	(MPa)	127.46	Dry
Tensile Strength	ISRM 1981	(MPa)	8.10	Dry
Flexural Strength	EN 12372	(MPa)	18.16	Dry
Resistance to Salt Crystallization	EN 12370	(Mass loss %)	-0.046	After 48 Cycles
Resistance to Freeze-Thaw	EN 12371	(Mass loss %)	-0.04	After 48 Cycles
Resistance to Acid (H2SO4)	EN 13919	(Mass loss %)	-0.03	After 48 Cycles
Thermal Shock	EN 14066	(Mass loss %)	-0.03	After 48 Cycles


Details

- Formats Available | Slabs
- Thickness Available | 2cm, 3cm
- Available Designs | Magma, Natural Lane Dark, Natural Lane Light, Hard Lane, Slope, Bedrock, Cliff, Satin
- Applications | Interior and Exterior Wall Cladding

Designs




Magma Design



Natural Lane Dark Design



Natural Lane Light Design



Cliff Design